

EVERYDAY PETG

PETG Basic Filament

1.75 mm · 1 kg spool · ±0.02 mm tolerance

Everyday PETG with good toughness and heat resistance for brackets, enclosures and functional parts.

- ✓ HDT 74 °C, above PLA
- ✓ Up to 250 mm/s
- ✓ Tough and durable
- ✓ Low warping, no enclosure

Recommended Print Settings

Nozzle temperature	220–240 °C
Bed temperature	70–80 °C
Print speed	40–250 mm/s
Support material	PVA, PLA (as support interface)


Filament Specifications

Material	Everyday PETG
Diameter	1.75 mm
Diameter tolerance	±0.02 mm
Net filament weight	1 kg

Spool & Packaging

Empty spool weight	150 g
Spool with filament	1.15 kg
Spool outer diameter	200 mm
Hub diameter	52 mm
Spool width	65 mm
Shipping weight	1.3 kg
Box dimensions	210 × 220 × 75 mm

Property Profile

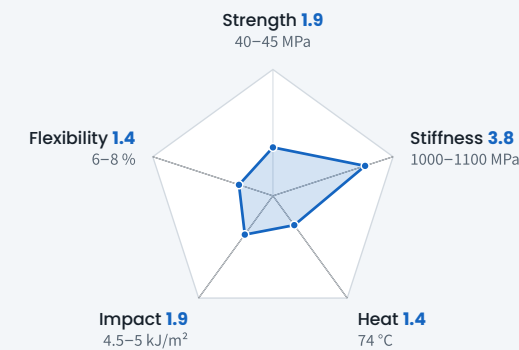

Scores from 1 to 5 relative to the OzFDM filament range, based on the typical values in this sheet (stiffness and impact on a log scale).

Storage & Handling

- Drying**
70 °C for 5 hours in a filament dryer or food dehydrator.
- Storage**
Airtight bag or container with desiccant in a cool, dark and dry area to prevent moisture absorption. For optimal long term storage we recommend drying the filament prior to sealing the filament spool in a vacuum bag with desiccant.

Mechanical Properties

PROPERTY	TEST METHOD	TYPICAL VALUE
Tensile strength	ISO 527	40–45 MPa
Elongation at break	ISO 527	6–8 %
Tensile modulus	ISO 527	1000–1100 MPa
Flexural strength	ISO 178	50–55 MPa
Impact strength	ISO 180	4.5–5 kJ/m ²

Physical Properties

PROPERTY	TEST METHOD	TYPICAL VALUE
Density	ISO 1183	1.27–1.28 g/cm ³
Melt flow rate (220 °C, 2.16 kg)	ISO 1133	4–6 g/10min
Moisture absorption (23 °C, 24 h)	ISO 62	<0.2 %

Thermal Properties

PROPERTY	TEST METHOD	TYPICAL VALUE
Heat deflection temperature (0.455 MPa)	ISO 75	74 °C
Continuous use temperature	IEC 60216	70 °C

Available Colours 15

							
White	Black	Natural	Silver	Rose	Pink	Grey	Orange
							
Green	Blue	Purple	Gold	Yellow	Brown	Red	

Swatches are indicative only. Colours vary between screens and with print settings.

NOTES

Values shown are typical results measured on test specimens and are provided for guidance only. They are not guaranteed specifications and should not be used as design limits. Printed part properties vary with printer, settings, print orientation and part geometry. Test your parts for suitability before use in critical applications.