

HIGH GLOSS PLA

Silk PLA Filament

1.75 mm · 1 kg spool · ± 0.03 mm tolerance

PLA with flow modifiers that give a high gloss, silky sheen, suited to decorative prints, gifts and display models.

- ✓ High gloss silk finish
- ✓ Helps hide layer lines
- ✓ Prints at standard PLA settings
- ✓ No enclosure needed

Recommended Print Settings

Nozzle temperature	200–230 °C
Bed temperature	25–60 °C
Print speed	40–60 mm/s
Support material	PVA, PETG (as support interface)


Filament Specifications

Material	High gloss PLA
Diameter	1.75 mm
Diameter tolerance	± 0.03 mm
Net filament weight	1 kg

Spool & Packaging

Empty spool weight	150 g
Spool with filament	1.15 kg
Spool outer diameter	200 mm
Hub diameter	52 mm
Spool width	65 mm
Shipping weight	1.3 kg
Box dimensions	210 × 220 × 75 mm

Property Profile

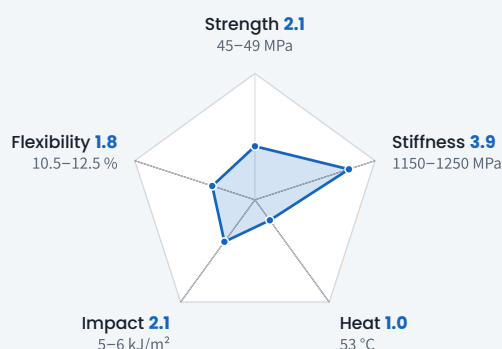

Scores from 1 to 5 relative to the OzFDM filament range, based on the typical values in this sheet (stiffness and impact on a log scale).

Storage & Handling

Drying
40–45 °C for 4–6 hours in a filament dryer or food dehydrator.

Storage
Airtight bag or container with desiccant in a cool, dark and dry area to prevent moisture absorption. For optimal long term storage we recommend drying the filament prior to sealing the filament spool in a vacuum bag with desiccant.

Mechanical Properties

PROPERTY	TEST METHOD	TYPICAL VALUE
Tensile strength	ISO 527	45–49 MPa
Elongation at break	ISO 527	10.5–12.5 %
Tensile modulus	ISO 527	1150–1250 MPa
Flexural strength	ISO 178	72–75 MPa
Impact strength	ISO 180	5–6 kJ/m ²

Physical Properties

PROPERTY	TEST METHOD	TYPICAL VALUE
Density	ISO 1183	1.25–1.26 g/cm ³
Melt flow rate (190 °C, 2.16 kg)	ISO 1133	5–10 g/10min
Moisture absorption (23 °C, 24 h)	ISO 62	<0.3 %

Thermal Properties

PROPERTY	TEST METHOD	TYPICAL VALUE
Heat deflection temperature (0.455 MPa)	ISO 75	53 °C
Continuous use temperature	IEC 60216	50 °C

Available Colours 17

							
Black	Grey	Silver	White	Red	Blue	Gold	Bright Gold
							
Yellow	Bronze	Copper	Light Green	Pink	Skin	Violet	Green
							
Coffee							

Swatches are indicative only. Colours vary between screens and with print settings.

NOTES

Values shown are typical results measured on test specimens and are provided for guidance only. They are not guaranteed specifications and should not be used as design limits. Printed part properties vary with printer, settings, print orientation and part geometry. Test your parts for suitability before use in critical applications.